



Cordless Fan Jacket
DFJ206 / DFJ207 / DFJ304
DFJ305 / DFJ405 / DFJ407

Satisfy Professional's Needs

Stay cool in hot harsh job sites

Effective cooling air flow produced by two Fan units



Two Fan units cool you down efficiently and with

Stand-up collar



Photo: DFJ405

Flat Fan units do not disturb your operation.



Two Fan units are separately positioned:

- to produce effective cooling air flow.
- not to bother you when you sit back.

Available in 3 types for different applications

Jacket + Fan

Polyester



DFJ206

DFJ207

Breathable and water repellent



Battery and charger are sold separately.

Cotton



DFJ304

DFJ305

Durable and water absorbing



Battery and charger are sold separately.

Titanium-coated polyester



DFJ405

DFJ407

UV and IR reflective



Battery and charger are sold separately.

With more comfort.

Powerful Fan units provide optimum air flow for efficient sweat evaporation.

With hood

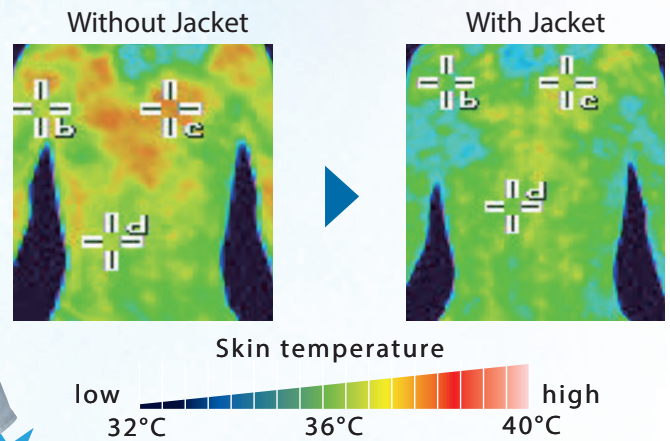


Photo: DFJ407

Comparison of body temperature rise during work

Skin temperature after a 10-minute work under temperature of 35°C and humidity of 60%

Never use the fan jacket where temperature reaches more than 50°C (122°F). Otherwise it may cause burns on your skin. Also avoid using in high humidity.



Battery holder Powered by Makita Li-ion Battery

Optional accessory



14.4V LITHIUM-ION



18V LITHIUM-ION



Battery and charger are sold separately.

Air flow control panel



Air flow mode indicator

Power ON/OFF & Cooling air volume control (3stages)

Each time you push the button High/Medium/ Low are selectable and displayed on the mode indicator.

Turbo button

When Turbo button is pushed, air flow can be increased for about 1 minute. (After 1 minute, the air level comes back to normal mode.)



Belt clip with lock

Thanks to Belt clip with lock, battery is securely held. (This feature is available only for 14.4V/18V battery holder.)

USB Power terminal

- Type A DC5V-2.1A
- Single port
- With rubber cap

Button for unlocking



USB output switch

Slide switch enables USB apparatus to operate.

Features

Drop prevention loops

for Fan units



Mesh pockets

are provided on the back of the jacket for storing ice packs.




Loops for attaching safety pin

Safety pin can be attached without pin holes in the jacket. (located on the left chest and left upper arm)



Optional Frame to ensure air inlet

By attaching Frame to Fan unit, you can make enough space between the jacket and layered raincoat/safety vest.



Foldable sleeves

can be folded and buttoned into short sleeves.



Shoulder pads

Shoulders are double layered for added durability against such damage as caused by rebars/scaffold materials carried on the shoulder. (DFJ405, DFJ407 only)



Enhanced flap of battery pocket

uses two loop-and-button closures instead of a hook-and-loop fastener.



Hood with mesh ear design

makes hearing easier. (DFJ207/ DFJ305/ DFJ407)



Longer continuous run time on a single full battery charge

Battery holder	Li-ion Battery	Continuous run time Low / Medium / High
	12V max	
	1.5Ah BL1016	6.5 / 4.5 / 2.5h
	14.4V	
	6.0Ah BL1460B	27.5 / 18.5 / 10.5h
	18V	
	6.0Ah BL1860B	40 / 26.5 / 18.5h

Battery & Charger


Battery	Charger
1.5Ah BL1016 2.0Ah BL1021B 4.0Ah BL1041B	DC10DW DC10SB
1.5Ah BL1415N 3.0Ah BL1430B 4.0Ah BL1440 5.0Ah BL1450 6.0Ah BL1460B	DC18RC DC18SF
	DC18SD DC18RE

This charger can charge LXT and CXT battery alternatively

Accessories

Filter set

Attaching a filter to Fan unit prevents the dust invasion into jacket at work site.

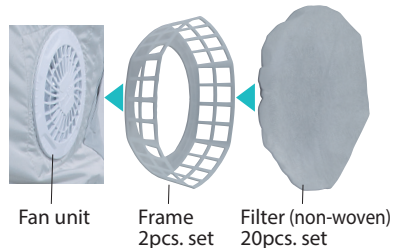

	Part No.
Filter set	198642-3
Filter 20pcs. set	198644-9
Frame	457924-5

Cordless Fan Jacket

DFJ206/ DFJ207/ DFJ304/ DFJ305/ DFJ405/ DFJ407

Electronic 4-Speed	Run Time (hr)	with BL1860B Low / Medium / High: 40 / 26.5 / 18.5
	Air Flow Settings	Turbo / High / Medium / Low
	Air Flow	Turbo / High / Medium / Low: 2.1 / 1.9 / 1.5 / 1.3 m ³ /min
	Size	S / M / L / XL / 2XL / 3XL
	Pockets	5
	Net weight	DFJ206: 360 g (0.8 lbs.), DFJ207: 380 g (0.8 lbs.) DFJ304: 460 g (1.0 lbs.), DFJ305: 490 g (1.1 lbs.) DFJ405: 440 g (1.0 lbs.), DFJ407: 460 g (1.0 lbs.)

Battery & Charger Sold Separately. Net weight: Jacket size L + Fan

weight according to EPTA-Procedure 01/2014
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201705